



C1

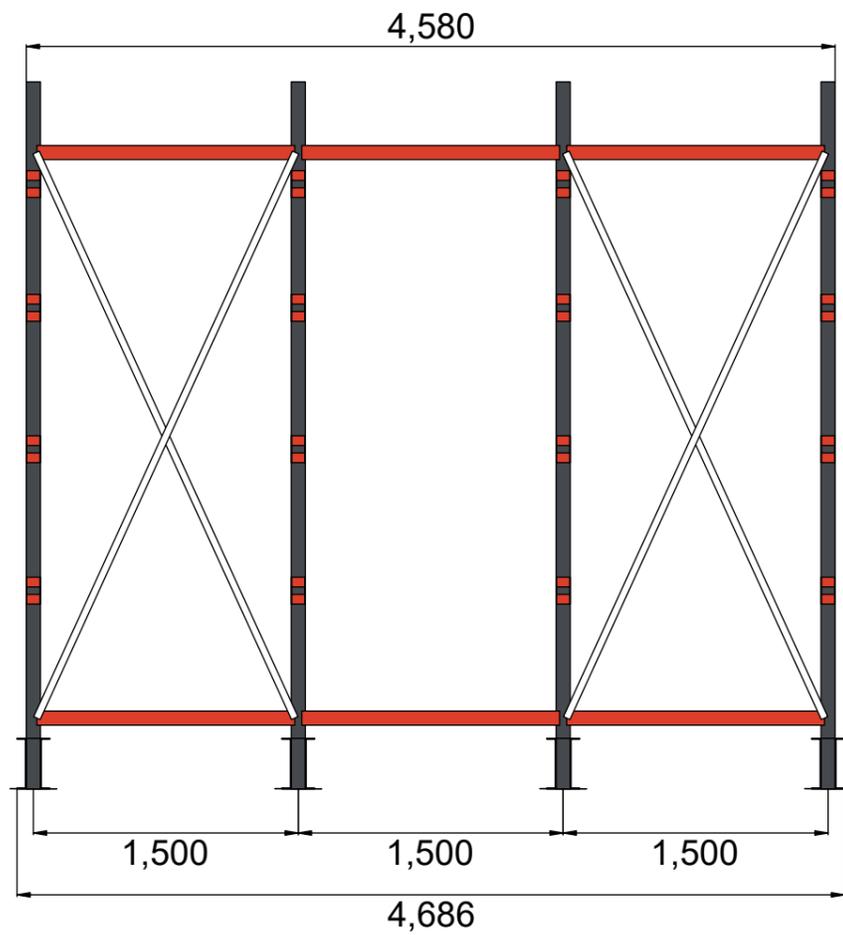

C1

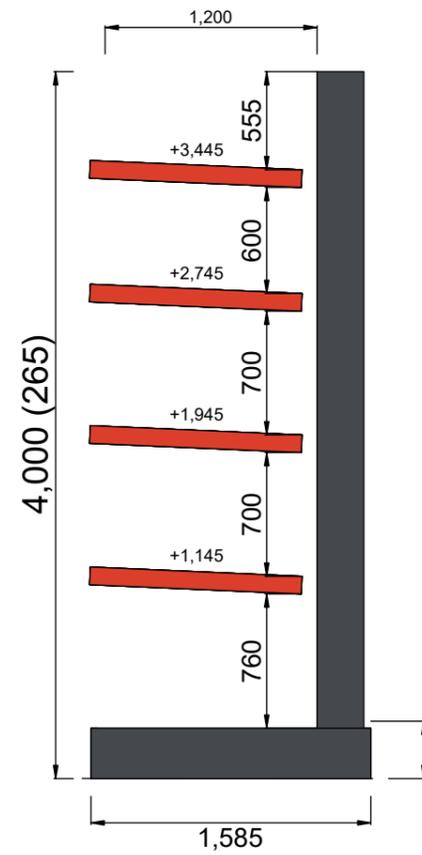

Maximum permitted load per column and side excluded load on the feet: 3000 kg
 Maximum arm load evenly distributed: 720 kg
 Maximum load on armlevel evenly distributed: 2909 kg

Tarmac floor:
 Tarmac plates must always be used according to the assembly instruction.
 Maximum permitted load assumes that the surface pressure on the tarmac is at least 0,8 MPa for long-term loads. The client/user must approve that the pressure requirement is met.

Declared strength values are based on tarmac temperatures below 25°C. On warmer days when tarmac is exposed to sunlight, the strength is reduced. EAB recommend protecting the tarmac from direct sunlight to ensure the permitted load according to the load label.



Product card
 Cantilever racking
 Productnumber 1RU41241516


DRAWING NUMBER

REVISION

DRAWING BY

DATE

18/2/2026

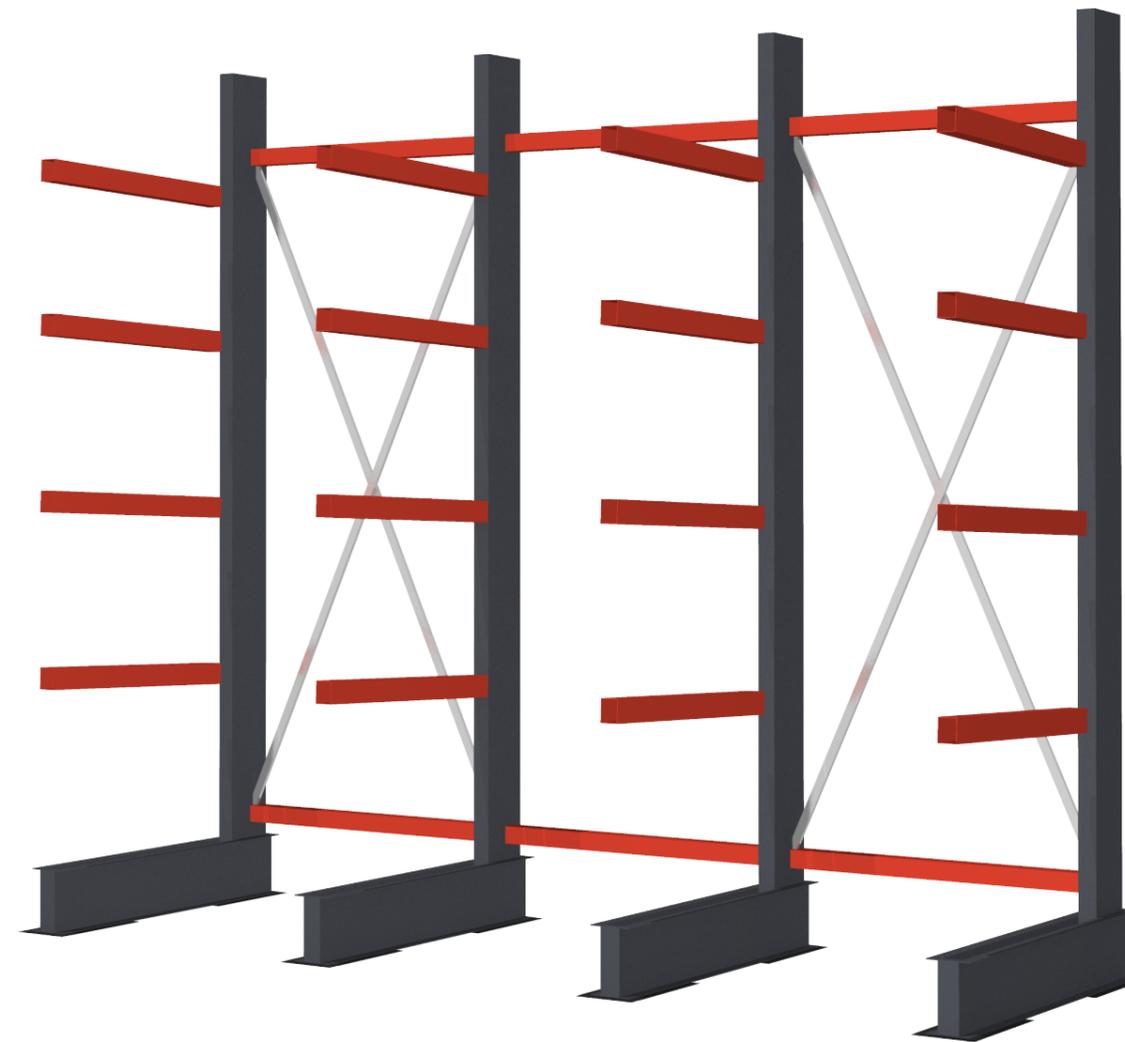

Product card
Cantilever racking
Productnumber 1RU41241516

DRAWING NUMBER

REVISION

DRAWING BY

DATE
18/2/2026

Options	Product Series	Part Number	Description	Quantity	EAB Weight
EAB					
Heavy Cantilever					
-		182600001	Asphalt glue HäftprimerEP 1 kg	1	1.2 kg
		187540885	Screw anchor HUS4 T-H 8x85	16	0.05 kg
		187541080	Screw anchor HUS4-H 10x80	8	0.1 kg
		560000100	Assembly instr. Cantilever HD (sv)	1	
		560000243	Label Cantilever rack HD 265x4 asphalt sv	1	
		562114000	Column 265*4000 mm t=4 mm	4	106.7 kg
		562711585	Singlesided foot 285*4(1250)	4	42.49 kg
		563631200	Arm #100*80*3-1200/800kg compl	16	12.21 kg
		564734015	Section without brace c/c 1500	1	21.85 kg
		564834015	Section with brace c/c 1500	2	29.95 kg
		569652643	Shim plate Cantilever rack 264*264*3	16	1.67 kg
		569855303	Asphalt plate Cantilever rack 530*264*3	8	3.35 kg
Total -					930.15 kg
Total Heavy Cantilever					930.15 kg
Total EAB					930.15 kg